
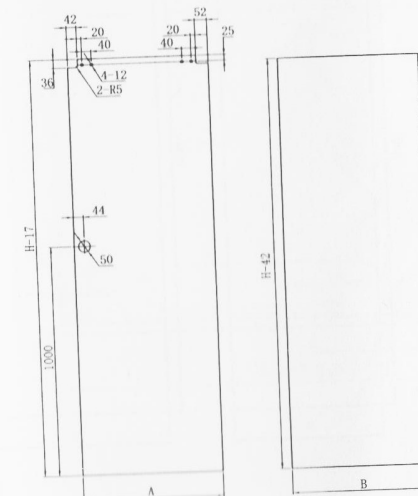






808 Sliding Door System Installation Guide (808-DG5018、808-DG509)



Installation Guide

Note:




1. This sliding door system should be installed by professional technical personnel.
2. The clamping area of the glass has to be cleaned with standard glass cleaner prior to installation.
3. The track must be mounted on metal structure or concrete crossbeam which is of sufficient loading capacity and at level state, with a maximum tolerance of 2mm per meter.
4. During daily usage, the sliding door should be gently operated and guided by hand, avoid excessive force or bumping, otherwise product duration will be shorten or even damage will be caused.
5. If the system is frequently used, an annual inspection and maintenance by professional technical personnel is necessary and highly recommended.

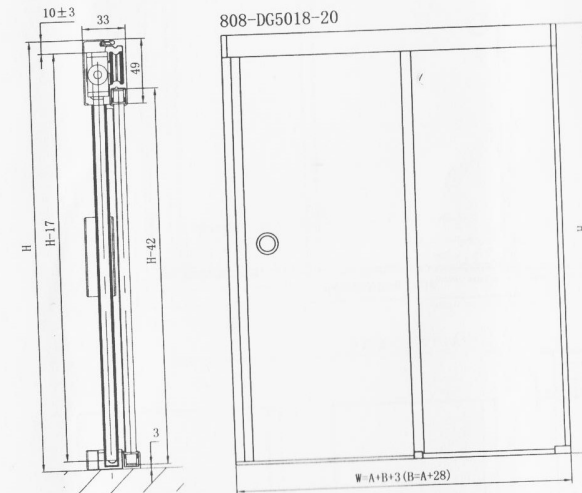


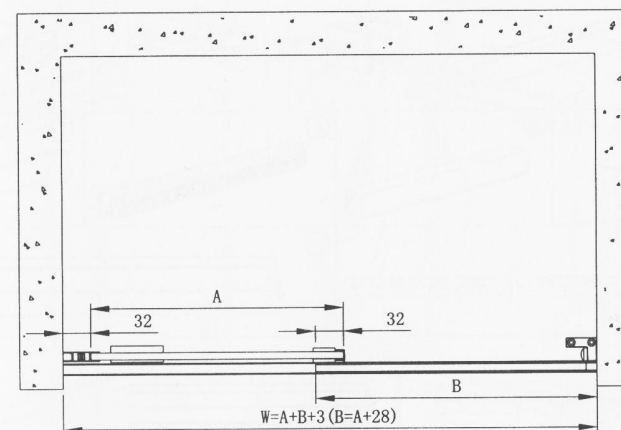
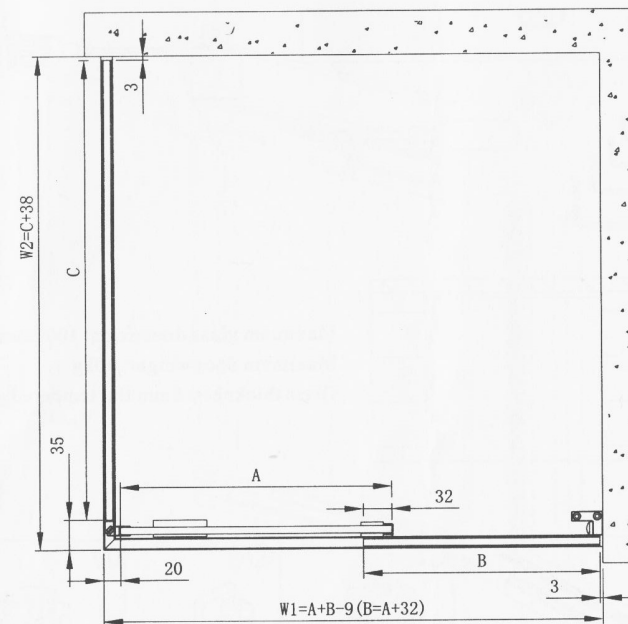
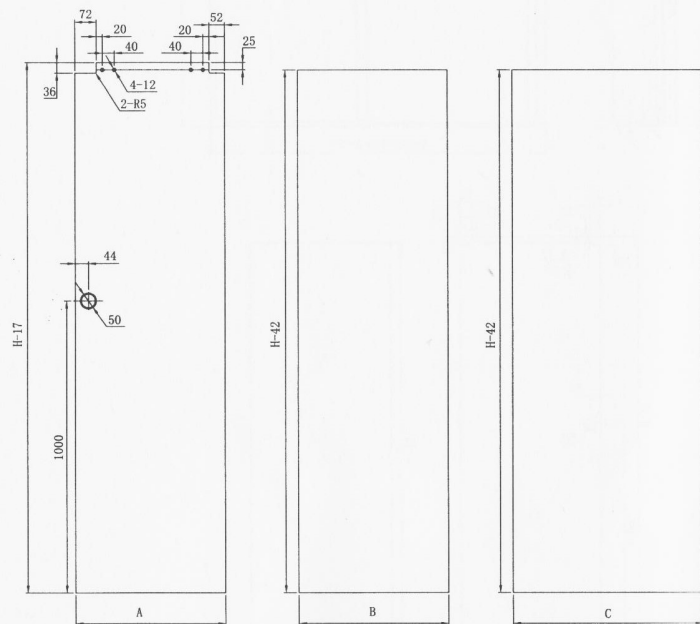
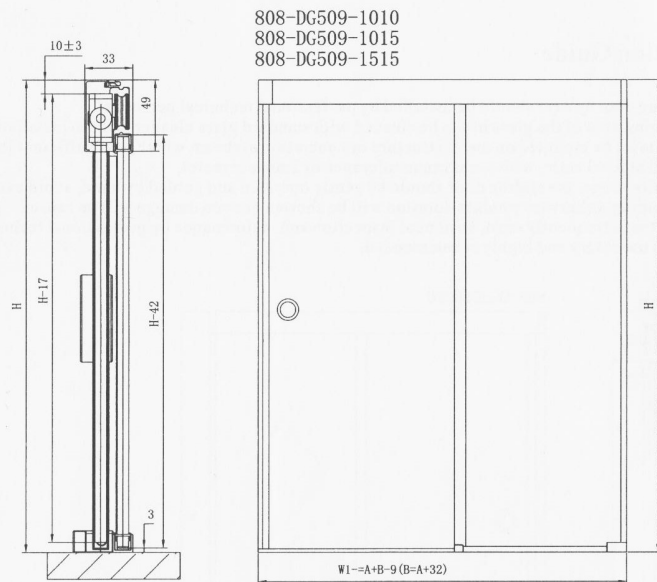


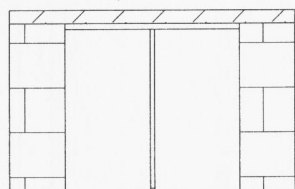
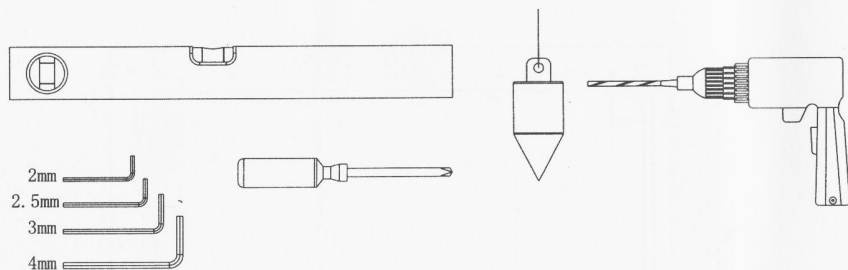


Maximum glass dimension: 1000mm X 2000mm
Maximum door weight: 50kg
Glass thickness: 8mm flat tempered glass

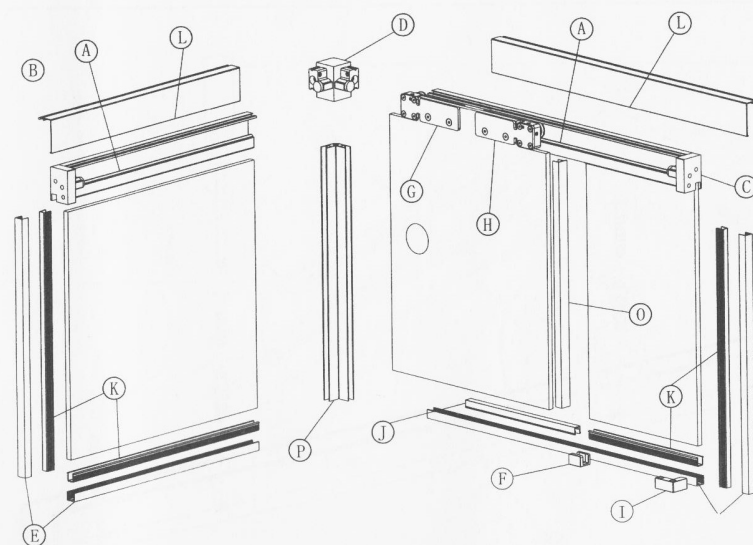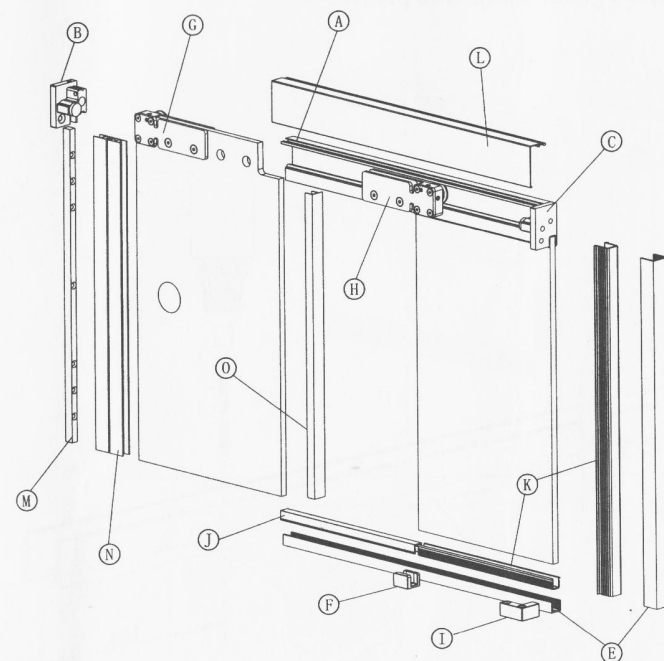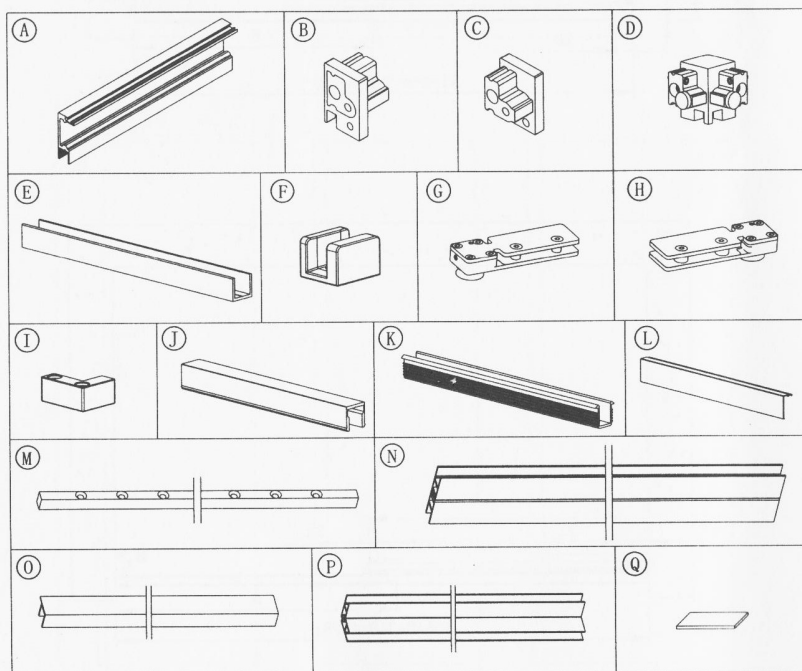


1. Installation of ground and side profile ⑤

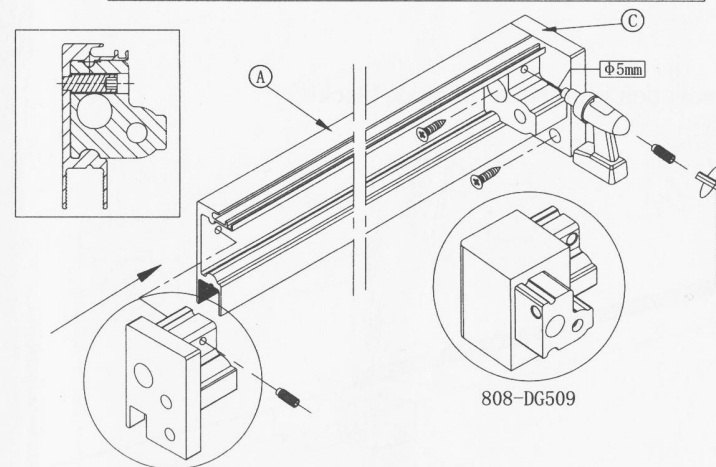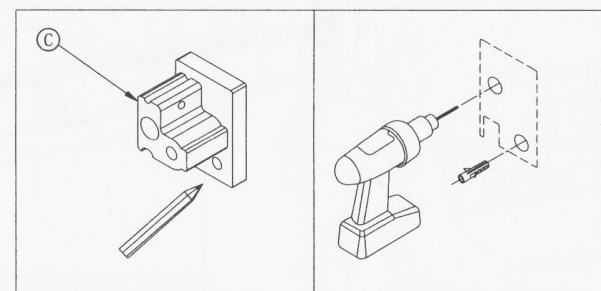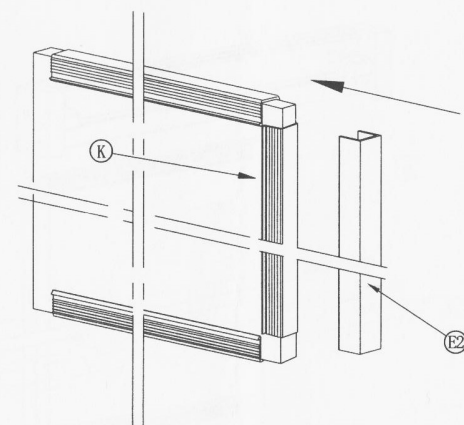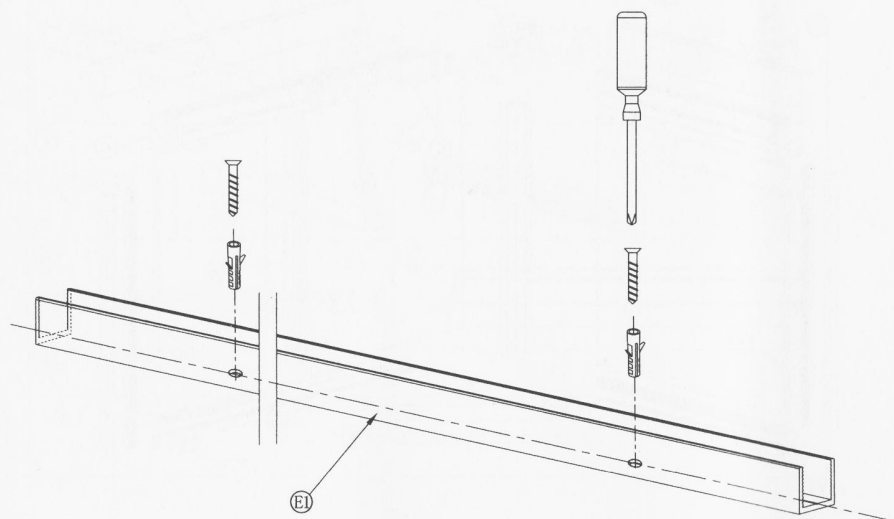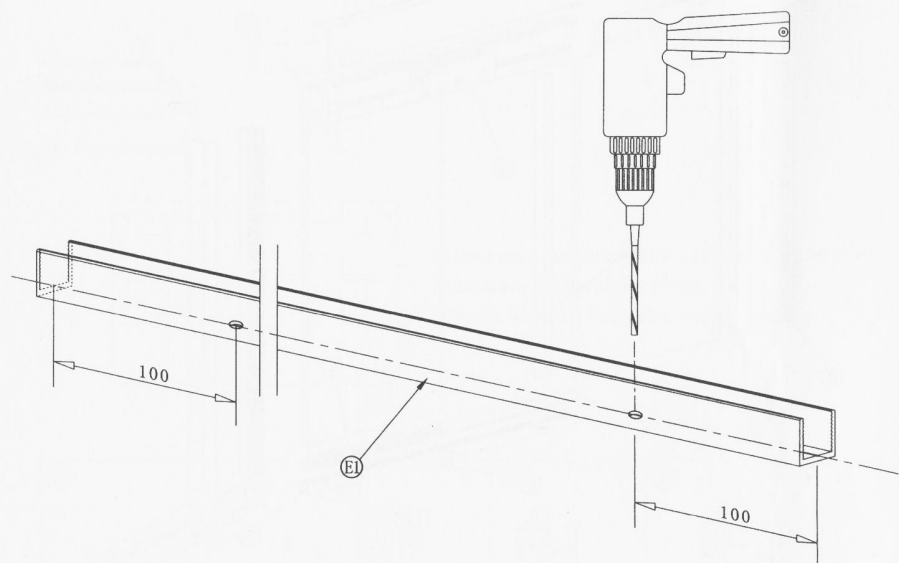


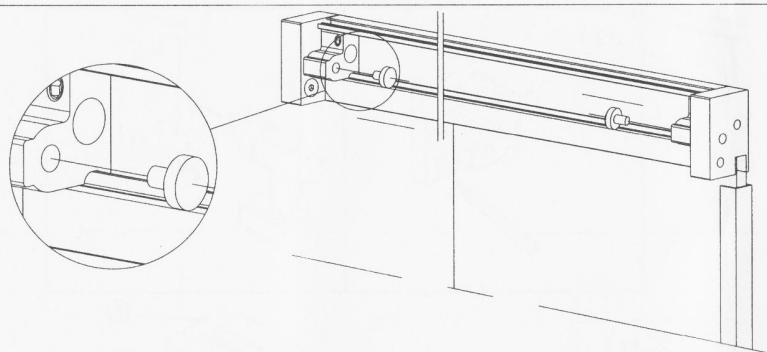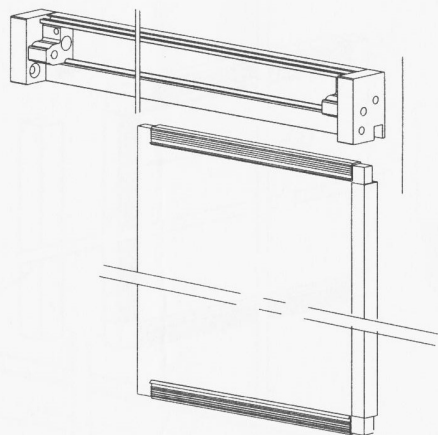


2. Installation instructions of guide block ⑥

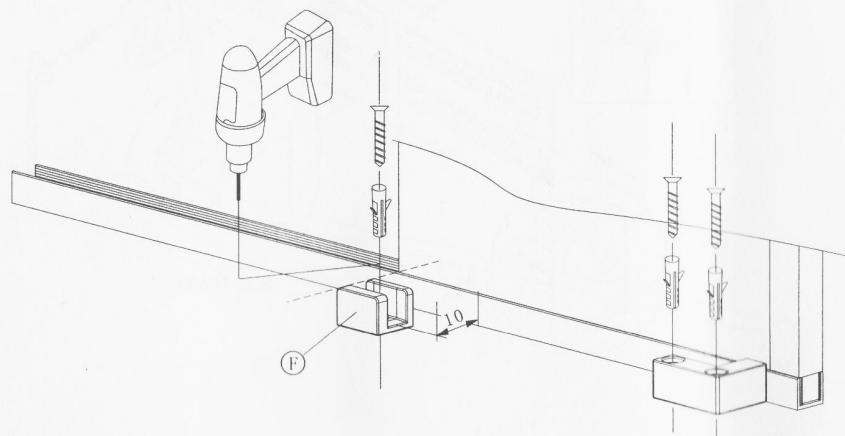

3. Installation of clamping patch ⑥ & ⑧

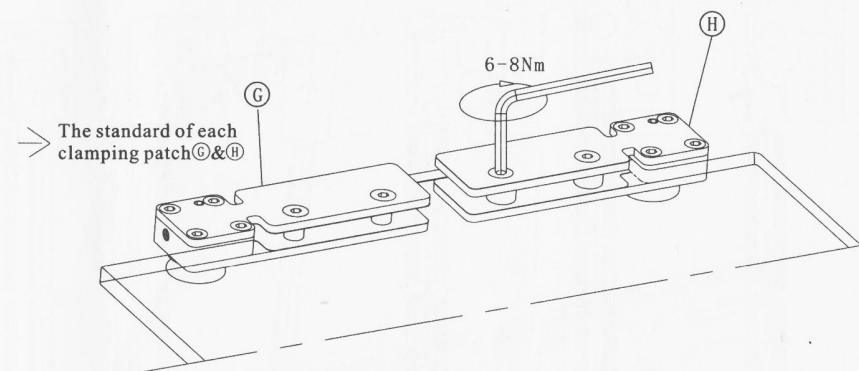


→ Adjust the roller at the bottom position

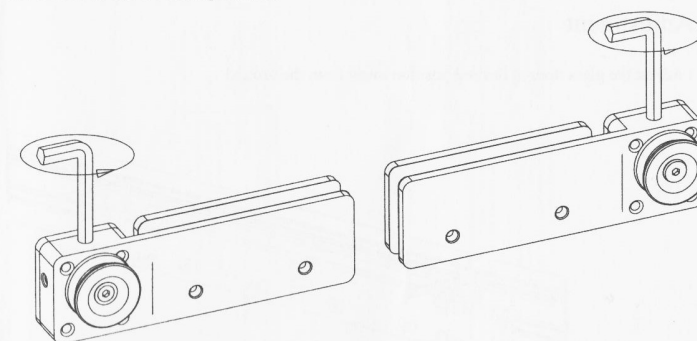


4. Installation of fixed panel and sliding door

Install the fixed panel

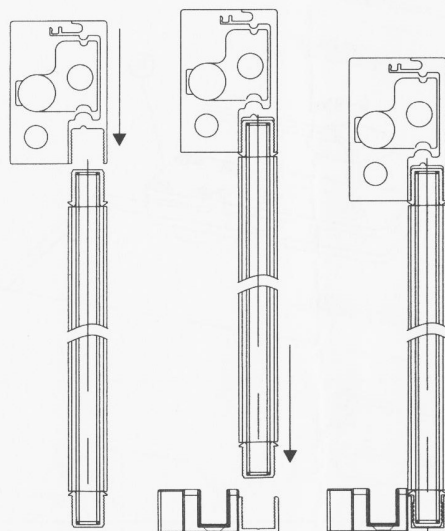


Install the sliding door


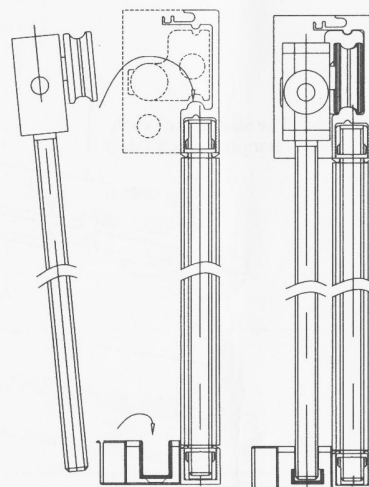


5. Adjustment

5. 1 Adjust the glass door at desired position away from the ground

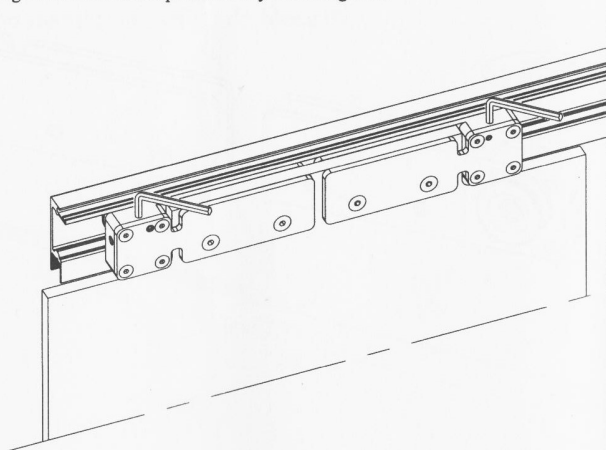

5. 2 Fasten the screw



5. 3 Stick the gasket ④

